

300 mm provided that a non-combustible roof is installed between the containers and the window


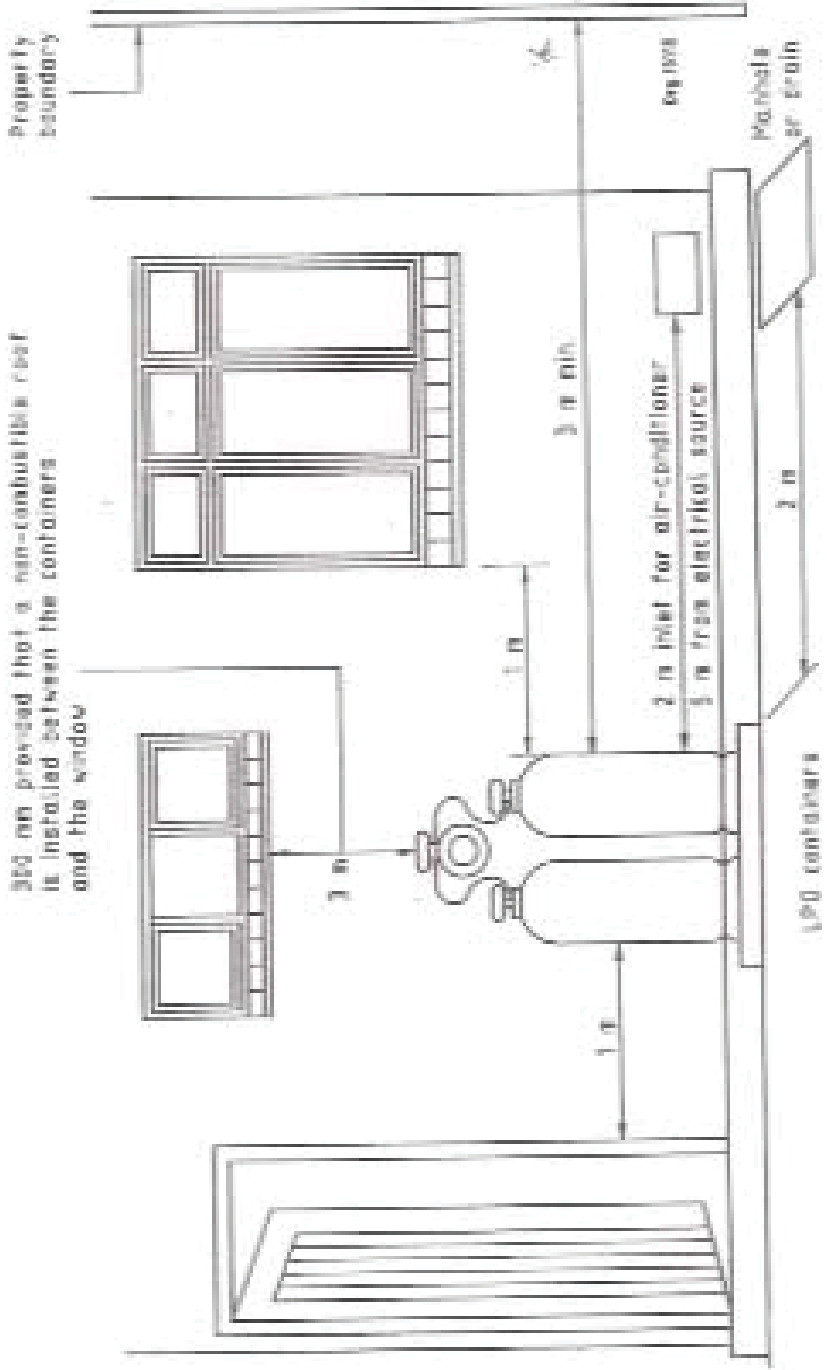


Figure 3 — Minimum distances

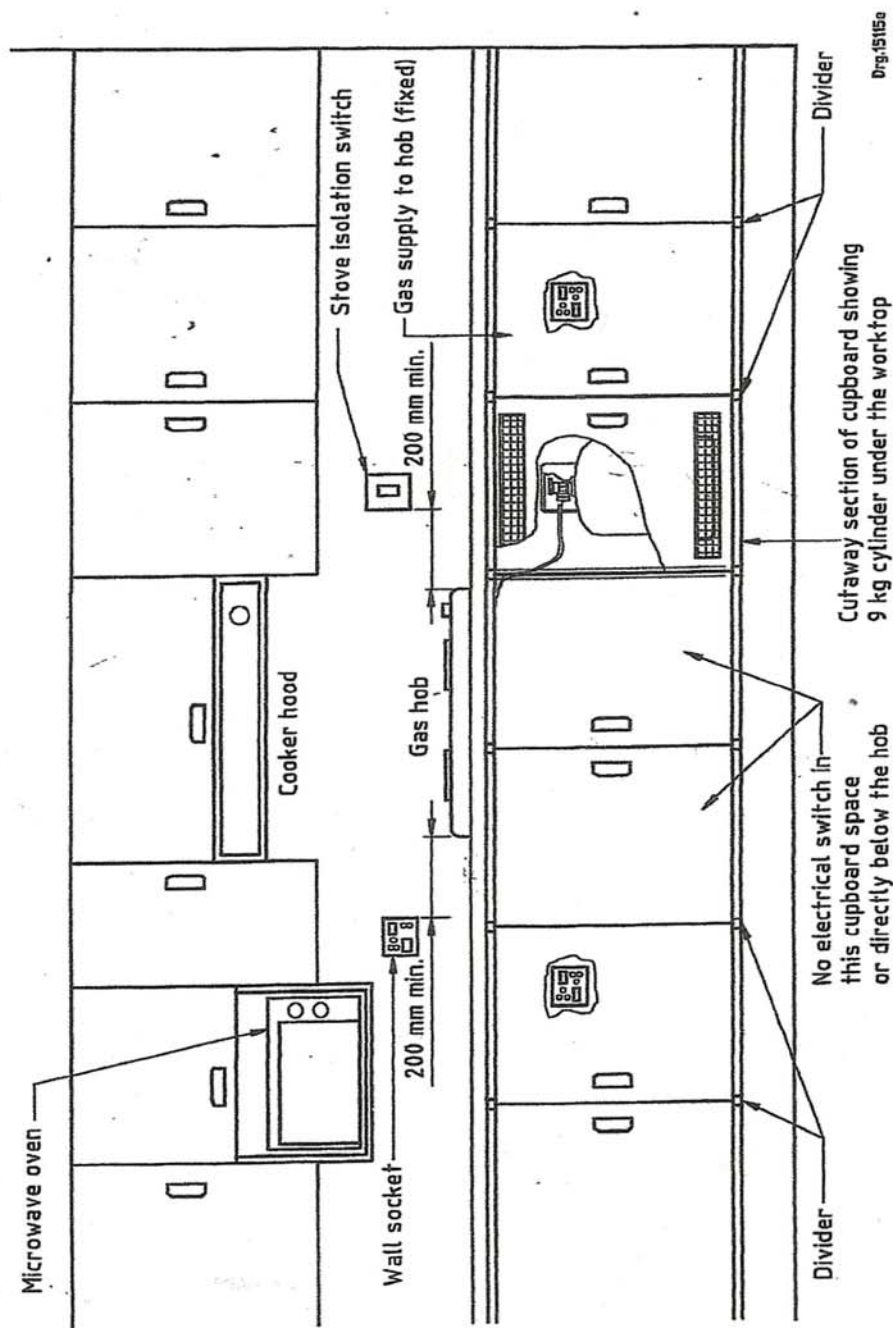

NOTE The hose goes through the solid partition and there are ventilation slots at the top and bottom of the cupboard door. If the worktop/cupboard installation is placed against an outside wall of the kitchen, a ventilation slot should also be placed on the outside wall at the bottom level of the cupboard.

Figure 16 — Typical installation for gas cylinder directly connected to hob by means of a flexible hose